

ET-M760BHBB
435W-455W

PERC MODULE



THE-STATE-OF-THE-ART APPAERANCE

Full black designed for a better aesthetic appearance and building integration.



High Efficiency

Higher module conversion efficiency benefit from half cut cell structure (low resistance characteristic, less mismatch loss).



PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.

WARRANTY

- Standard Module Performance Warranty
- EliTe Solar Mono Module Linear Performance Warranty

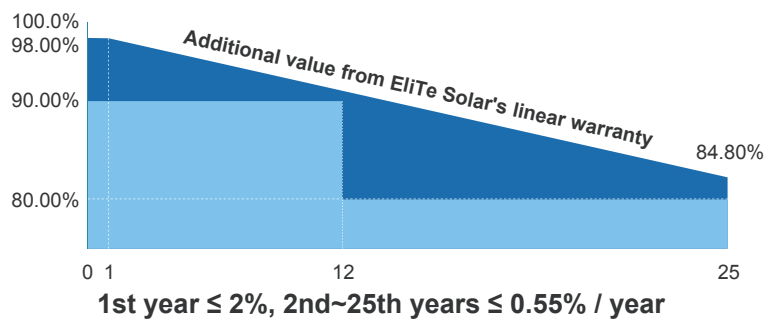

Guarantee on product material and workmanship



Linear power output warranty

IEC61215
IEC61730
UL61215
UL61730



